


# IP67 WATERPROOF LED TUBE

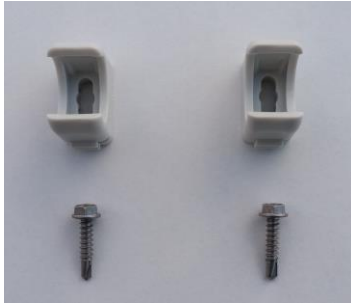

## FEATURES

- ENERGY EFFICIENT
- IP67 WATERTIGHT ENCLOSURE AND CONNECTORS
- 120° VIEWING ANGLE
- ADJUSTABLE MOUNTING ANGLE
- MOUNTING KIT INCLUDED
- SAFE, LOW VOLTAGE WIRING
- REGULATED LED CURRENT ENSURES LONG LIFE
- MAY BE CONNECTED IN SERIES UP TO 4A MAX
- AVAILABLE IN COOL WHITE, WARM WHITE, BLUE, RED, AND GREEN
- **CUSTOM LENGTHS AVAILABLE**
- **CUSTOM CORD LENGTHS AVAILABLE**
- **CUSTOM CONNECTORS AVAILABLE**

MADE IN THE USA



Part #	Length	Light Output	Color	Voltage	Wattage	Connector
150-240-MO-W-12	96"	1360 lumens	6500 K	12V	10.6W	Male one end
150-240-MF-W-12	96"	1360 lumens	6500 K	12V	10.6W	Male and Female
150-180-MO-W-12	72"	1020 lumens	6500 K	12V	8.4W	Male one end
150-180-MF-W-12	72"	1020 lumens	6500 K	12V	8.4W	Male and Female
150-120-MO-W-12	48"	680 lumens	6500 K	12V	5.3W	Male one end
150-120-MF-W-12	48"	680 lumens	6500 K	12V	5.3W	Male and Female
150-090-MO-W-12	36"	510 lumens	6500 K	12V	4.1W	Male one end
150-090-MF-W-12	36"	510 lumens	6500 K	12V	4.1W	Male and Female
150-060-MO-W-12	24"	340 lumens	6500 K	12V	2.6W	Male one end
150-060-MF-W-12	24"	340 lumens	6500 K	12V	2.6W	Male and Female
150-045-MO-W-12	18"	255 lumens	6500 K	12V	1.9W	Male one end
150-045-MF-W-12	18"	255 lumens	6500 K	12V	1.9W	Male and Female
150-030-MO-W-12	12"	170 lumens	6500 K	12V	1.2W	Male one end
150-030-MF-W-12	12"	170 lumens	6500 K	12V	1.2W	Male and Female

## DRIVERS

INPUT VOLTAGE: 100 - 264 VOLTS, 50/60 Hz

Part #	Watts	Enclosure	Length	Width	Height
150003	12W	NEMA 1	3"	1.6"	1.1"
150004	16W	NEMA 1	3"	1.6"	1.1"
150005	40W	NEMA 1	6.4"	1.7"	1.3"
150006	60W	NEMA 1	6.4"	1.7"	1.3"
533-12	40W	NEMA 4X	3.2"	6.3"	3.5"
556-12	108W	NEMA 4X	11"	7.5"	5.1"
541-12	200W	NEMA 4X	11"	7.5"	5.1"



Kodiak Technology, Inc.  
2840 Road 154  
cbrown@kodiaktechnology.com

970-797-0721  
Albin, WY 82050  
<http://www.kodiaktechnology.com>