



Spec Grade Fluorescent Wash Down Fixtures

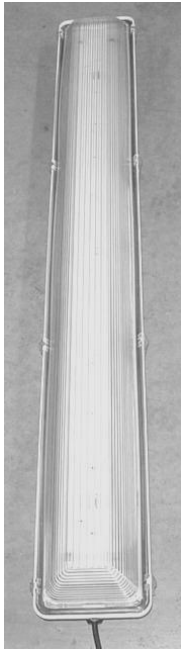

Wastewater Plants
Car Washes
Livestock Stables
Food Processing
Pharmaceutical Industry
Marinas
Amusement/Waterparks
NEW 8800 Lumen LED MODEL

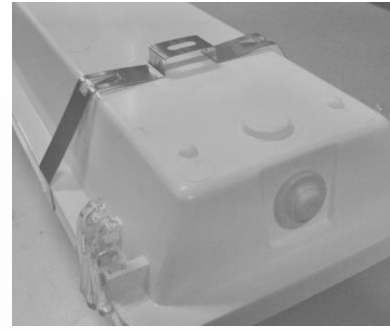

Features-

IP65 Certified (dust and water tight)
 1, 2, 3, 4 and 6 lamp configurations
 T8 or T5 lamps

White Fiberglass base
 High Impact Ribbed Polycarbonate Diffuser

Continuously bonded neoprene gasket
 Stainless steel or Plastic cam latches
 High efficiency electronic ballasts

Input voltages from 12Vdc to 480Vac

Stainless Steel mounting brackets screw to mounting surface. Fixture snaps into mounting bracket (see above right picture)

MADE IN THE USA

Mounting Bracket Detail

# OF LAMPS	MODEL NUMBER	LAMP & BALLAST CONFIGURATION	LENGTH	WIDTH	HEIGHT	INPUT POWER
4	126-LED-UNV	8800 Lumen LED Array	51.7"	6.8"	4.4"	94 W
1	126-1xF32T8-ISE-UNV	1xF32T8 IS Electronic	51.7"	6.8"	4.4"	30 W
2	126-2xF32T8-ISE-UNV	2xF32T8 IS Electronic	51.7"	6.8"	4.4"	58 W
2	126-2xF32T8-DE-UNV	2xF32T8 Prog Start Dimming, 0-10V control	51.7"	6.8"	4.4"	58W max
3	126-3xF32T8-UNV	3xF32T8 IS Electronic	51.7"	6.8"	4.4"	87 W
1	126-1xF54T5-PSE-UNV	1xF54T5HO PS Electronic	51.7"	6.8"	4.4"	59 W
2	126-2xF54T5-PSE-UNV	2xF54T5HO PS Electronic	51.7"	6.8"	4.4"	115 W
3	126-3xF54T5-PSE-UNV	3xF54T5HO PS Electronic	51.7"	6.8"	4.4"	174 W
4	132-4xF54T5-ISE-UNV	4xF54T5HO IS Electronic	100"	6.8"	4.4"	230W
6	132-6xF54T5-ISE-UNV	6xF54T5HO IS Electronic	100"	6.8"	4.4"	345W
OPTION		NOTES			PART NUMBER ADDER	
Lamp type		Specify color & CRI when ordering with lamps			F32T8, F54T5HO	
Ballast type		Instant start electronic High Ballast Factor instant start electronic Programmed start electronic Dimmable electronic; 0-10Vdc control			ISE HIS PSE DE	
Input voltage and frequency		Volts/Hertz (Universal Input (UNV) is standard)			UNV; 12Vdc; 24Vdc; 480V; etc.	
Latches		Stainless Steel Clear Polycarbonate			SSL PCL	
Conduit hubs		½" NPT die cast hubs each end			DCH	
6' Cord		16/3 SJOW with NEMA 15 plug			6C	
25' Cord		16/3 SJOW with NEMA 15 plug			25C	
Photoelectric sensor		Factory installed on one end; specify which end			PES	
Chain hung bails		2 Stainless Steel bails that couple chain to hangers			CHB	

Typical part number for standard fixture: **126-2xF32T8-ISE-UNV-SSL-___**. Specify lamp type, ballast type, voltage and mechanical options when ordering.

Application Notes:

When installed with conduit, the inside of the feed conduit should be sealed with silicone sealant at the fixture hub to prevent condensation from entering the fixture through the conduit. Any holes drilled through the enclosure must be sealed.



Kodiak Technology, Inc., cbrown@kodiaktechnology.com; www.kodiaktechnology.com
2840 Albin, WY 82050

call: 970-797-0721