


## Applications


- Manufacturing Plants
- Warehouses
- Gyms
- Automotive Dealerships

## Features

- ◆ Specular aluminum reflector
- ◆ 0-10V dimming
- ◆ 100-277 Volt universal input
- ◆ 50,000 hour rated life
- ◆ Operating temp: -20°C ~45°C
- ◆ ROHS
- ◆ White powder coated housing
- ◆ External driver box minimizes temperature rise, maximizes driver life
- ◆ Driver box has top side access door for easy wiring
- ◆ Standard knock outs at ends and rear of the driver box
- ◆ Standard V-Hook included
- ◆ Optional lensed door and wire guard available

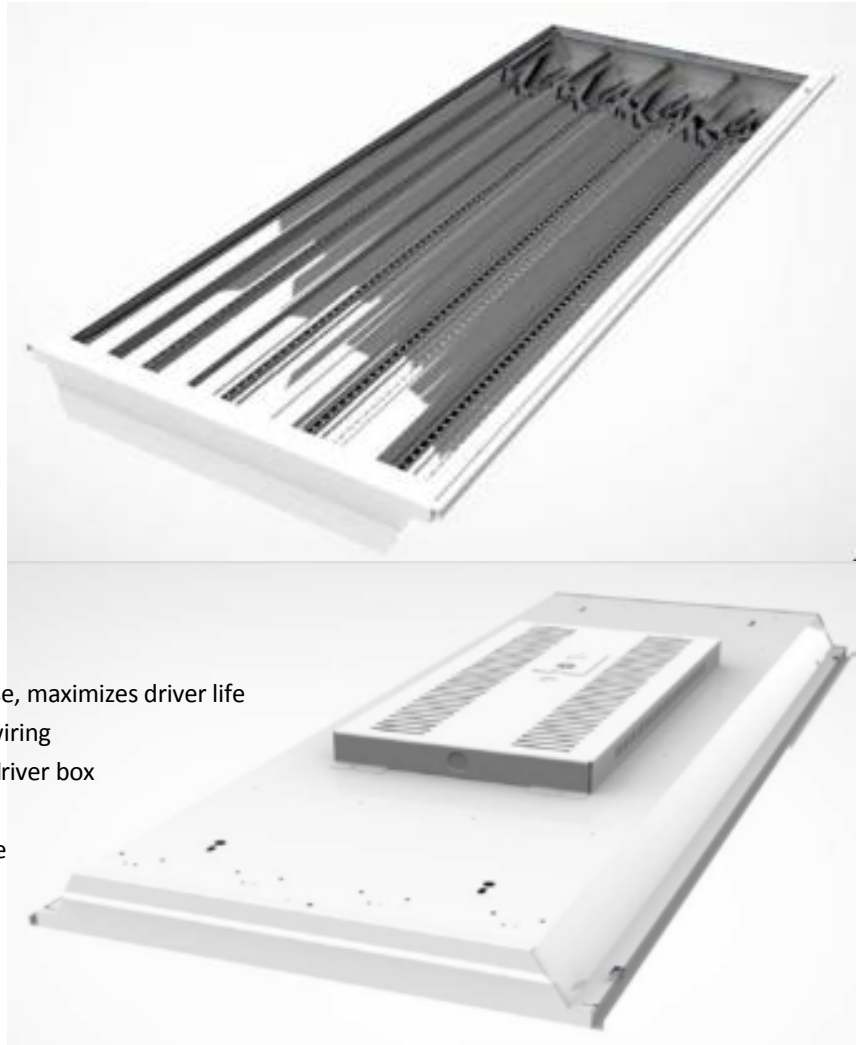

## Dimensions

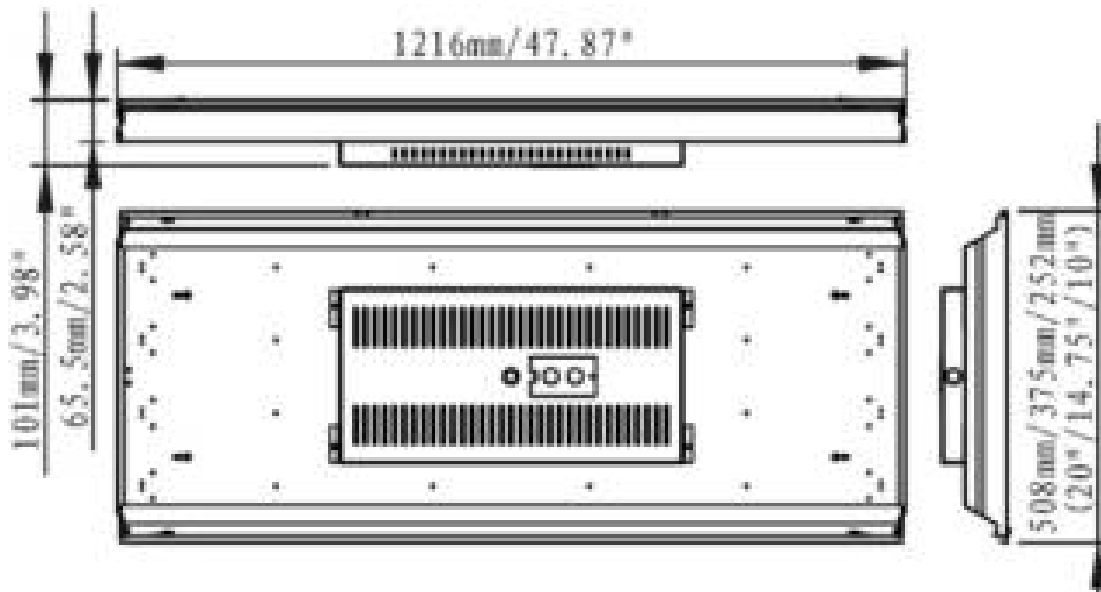

## Specifications

Item	Specification	Model No.		
		LEHB100UNV	LEHB140UNV	LEHB200UNV
General Information	Delivered Lumens	10800lm	15120 lm	21600 lm
	Efficacy	108lm/W	108lm/W	108lm/W
	Power Consumption	100W	140W	200W
	Color Temperature(CCT )	5500K	5500K	5500K
	Color Rendering Index (CRI)	>80	>80	>80
	L70 Life (Hours)	50,000 hours	50,000 hours	50,000 hours
LED Driver	Power Factor	0.96	0.95	0.96
	Input Voltage	100 ~ 277V AC	100 ~ 277V AC	100 ~ 277V AC
	Input Frequency	50/60Hz	50/60Hz	50/60Hz
	Power Efficiency	90.5%	91%	91.5%
	Output Current	2.8A	3.15A	4.9A
	Output Voltage	26 ~ 43V DC	24 ~ 47V DC	24 ~ 40V DC
	MAX THD (%)	20%	20%	20%
	Dimmable function	0-10V Dimming	0-10V Dimming	0-10V Dimming
	Power Module Quantity	1	1	1
LED Module	Size of LED Module	1115*10*1mm	1115*10*1mm	1115*10*1mm
	LED module Quantity	4	6	8
	LED Total Quantity	288	360	480
	LED Type	LG 5630	LG 5630	LG 5630
	LED Drive current	116mA	105mA	102mA
	LED Class	L70 rated to 50,000 hours		
Physical	Size L x W x H	47.9" x 10" x 2.6"	47.9" x 14.75" x 4"	47.9" x 20" x 4"
	Housing	spcc0.6 white powder coating		
	Lens	clear PMMA		
	Mounting	see accessories		
Environment	Operating Temperature	-20°C ~45°C		
	Material Usage	RoHS compliant, no mercury		
	Applicable location	Indoor		
Accessories	Door Frame & Lens	LEHBL4DF	LEHBL6DF	LEHBL8DF
	Door Frame & Flat Wire Guard	LEHBL4DFWG	LEHBL6DFWG	LEHBL8DFWG
	Door Frame ,Flat Wire Guard & Lens	LEHBL4DFWGL	LEHBL6DFWGL	LEHBL8DFWGL
	10ft SO Cord & Plug for 277V	LEHBLC277	LEHBLC277	LEHBLC277
	10ft SO Cord & Plug for 120V	LEHBLC120	LEHBLC120	LEHBLC120
	Cable Hanging kit	LEHBCHK	LEHBCHK	LEHBCHK
	Pendant Mounting Kit	LEHBPMK	LEHBPMK	LEHBPMK

## Accessories

---

10ft Cord & Plug for 120V



10ft Cord & Plug for 277V



Cable Suspension Kit



Door Frame & Lens



Door Frame & Wire Guard



Door Frame, Wire Guard & Lens



Pendant Mounting Kit

